



100G-QSFP28-LR4-20

100GBASE-LR4 20km QSFP28 Optical Transceiver with DDM

PRODUCT FEATURES

- QSFP28 MSA compliant
- 4x25Gb/s electrical interface
- Supports 103.125Gb/s aggregate bit rate
- Up to 20km transmission on single mode fiber
- LC duplex connector
- 4-lane DFB and 4-lane Pin
- Commercial case temperature: 0 °C to 70°C
- Single 3.3V power supply
- Maximum power consumption 4 Watts
- RoHS

APPLICATIONS

- 100GBASE-LR4 Ethernet
- Telecom networking
- Data Center Interconnect

COMPLIANCE

- QSFP28 MSA
- SFF-8665
- IEEE802.3ba
- ROHS


Ordering information

Part Number	Data Rate (Gb/s)	Media	Wavelength (nm)	Operating distance (km)	Temperature (°C)	Notes
100G-QSFP28-LR4-20	103.125	SMF	LAN-WDM	20	0~70	Non hermetic, 4x25Gbps 0-70°C,COB
100G-QSFP28-LR4-20H	103.125	SMF	LAN-WDM	20	0~70	Hermetic, 4x25Gbps 0-70°C,COB
100G-QSFP28-LR4-20HB	103.125	SMF	LAN-WDM	20	0~70	Hermetic, 4x25Gbps 0-70°C,BOX
100G-QSFP28-LR4-20U	103.125	SMF	LAN-WDM	20	0~70	Compliant 4x25Gbps, 0-70°C,COB Unit


PRODUCT DESCRIPTION

100G-QSFP28-LR4-20 is designed for 20km optical communication applications. This module contains 4-lane DFB optical transmitter, 4-lane optical receiver and module management block including 2 wire serial interfaces. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector.

1. Block Diagram

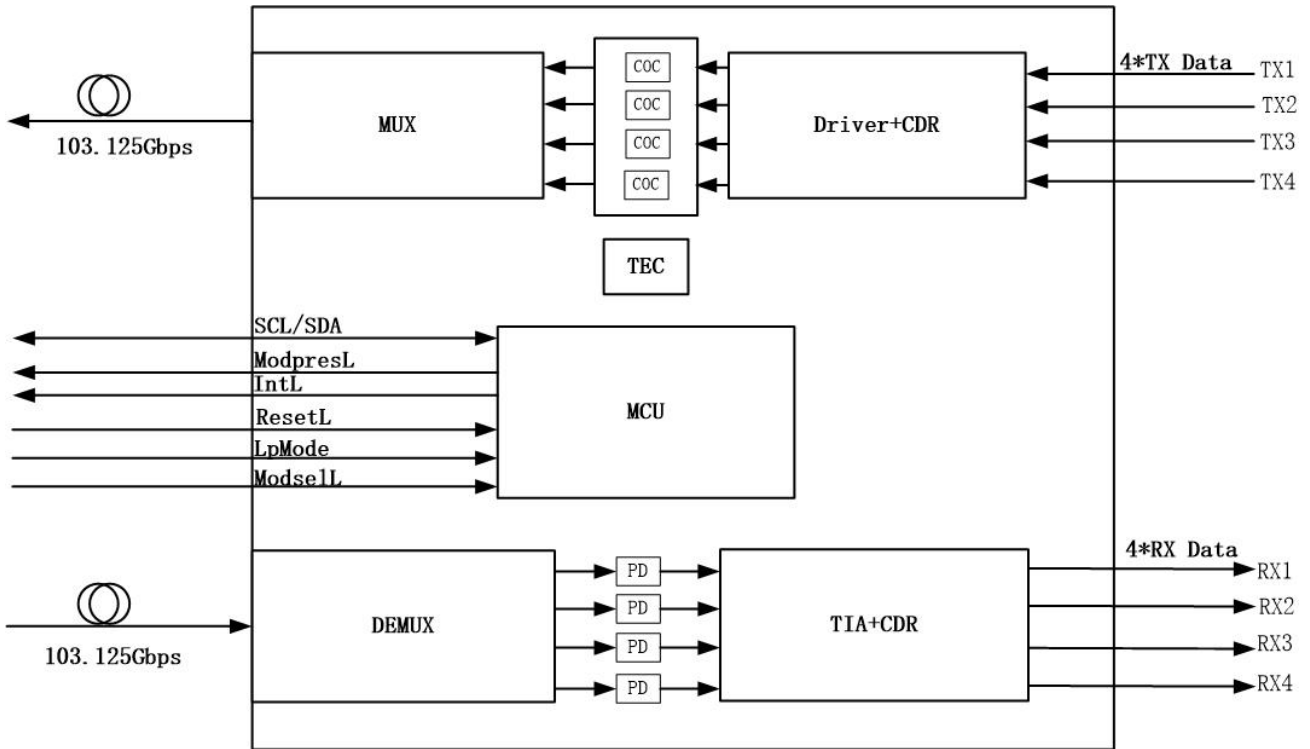

2. Pin Diagram

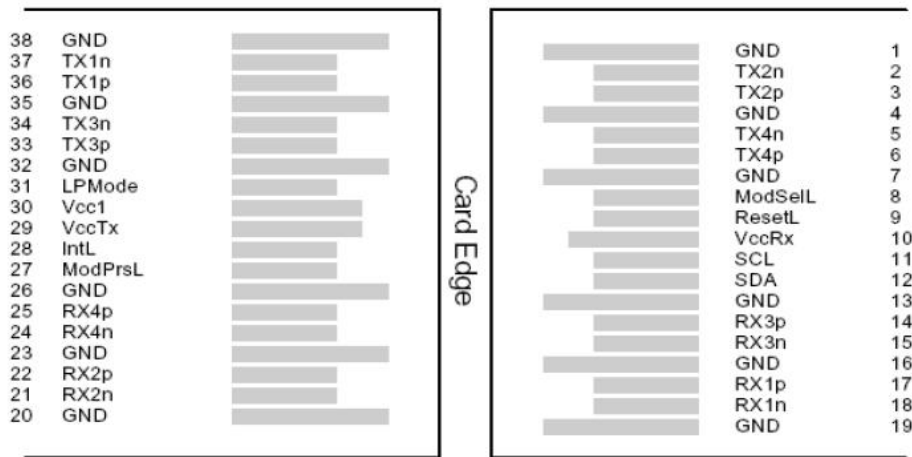

Top Side
Viewed from Top

Bottom Side
Viewed from Bottom

QSFP28 38pin connector (SFF 8665)

3. Pin Descriptions

Pin	Symbol	Name/Description	Notes
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	1
8	ModSelL	Module Select	
9	ResetL	Module Reset	
10	Vcc Rx	+3.3V Power supply receiver	
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	1
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrSL	Module Present	
28	IntL	Interrupt	
29	Vcc Tx	+3.3V Power supply transmitter	
30	Vcc1	+3.3V Power supply	
31	LPMODE	Low Power Mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	
35	GND	Ground	1
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Input	
38	GND	Ground	1

Notes:

1. Circuit ground is internally isolated from chassis ground.

4. Absolute Maximum Ratings

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Maximum Supply Voltage	Vcc	0		3.6	V	
Storage Temperature	Ts	-40		85	°C	
Operating Case Temperature	T _{case}	-5		75	°C	
Relative Humidity	RH	0		85	%	

5. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	T _{case}	0		70	°C	
Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Relative Humidity	RH	5		85	%	
Power Dissipation	PD			4	W	
Data Rate (optical)	DRO		4*25.78125		Gbps	
Data Rate (Electrical)	DRE		4*25.78125		Gbps	
Operating Link Distance	LD			20	km	

6. Electrical Characteristics

100GBASE-LR4 Operation (EOL, TOP = 0 ~70 °C ,V_{CC} = 3.135 to 3.465 V)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Power Dissipation				4	W	
Supply Current	I _{cc}			1.15	A	
Transmitter						
Data Rate, each lane			25.78125		Gbps	
Differential Voltage pk-pk	V _{pp}	350			mV	
Input differential impedance	R _{in}		100		Ohm	
Differential Termination Resistance Mismatch				10	%	
Receiver						
Data Rate, each lane			25.78125		Gbps	
			27.95250		Gbps	
Output differential impedance	R _{out}		100		Ohm	
Differential Termination Resistance Mismatch				10	%	
Differential output voltage	V _{out, pp}		400		mV	

7. Optical Characteristics

100GBASE-LR4 Operation (EOL, TOP = 0 ~70 °C ,V_{CC} = 3.135 to 3.465 V)

Parameters	Symbol	Min	Typical	max	Unit	Notes
Transmitter						
Signal Speed per Lane	BR	25.78125 ± 100 ppm			Gb/s	
Transmit wavelength	λ ₀	1294.53		1296.59	nm	
	λ ₁	1299.02		1301.09	nm	
	λ ₂	1303.54		1305.63	nm	
	λ ₃	1308.09		1310.19	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Total Average Launch Power	P _{total}			10.5	dBm	
Average launch power, each lane	P _{out}	-4.3		4.5	dBm	
Optical Modulation Amplitude (OMA), each lane	P _{OMA}	-1.3		4.5	dBm	

Launch power OFF per lane				-30	dBm	
Transmitter and Dispersion Penalty (TDP), each lane	TDP			2.2	dB	
Extinction Ratio (ER)	ER	4			dB	
Transmitter eye mask definition {X1,X2, X3, Y1, Y2, Y3}	{0.25, 0.4, 0.45, 0.25, 0.28, 0.4}					1
Mask margin		15			%	1
Receiver						
Signaling Speed per Lane	BR	25.78125 ± 100 ppm			Gb/s	
Receive wavelength	λ0	1294.53		1296.59	nm	
	λ1	1299.02		1301.09	nm	
	λ2	1303.54		1305.63	nm	
	λ3	1308.09		1310.19	nm	
Damage threshold, each lane		5.5			dBm	
Average receive power, each lane		-10.6		4.5	dBm	
Receive power, each lane(OMA)		-8.6		4.5	dBm	2
Receiver reflectance				-26	dB	
LOS Assert		-24		-13.6	dBm	
LOS De-Assert				-11.6	dBm	
LOS Hysteresis		0.5		6	dB	

Notes:


1. Hit ratio 5×10^{-5} .
2. Sensitivity is specified at BER@1E-12.

8. Digital Diagnostic Monitoring Functions

100G-QSFP28-LR4-20 support the I2C-based Diagnostic Monitoring Interface (DMI) defined in document SFF-8665. The host can access real-time performance of transmitter and receiver optical power, temperature, supply voltage and bias current.

Parameter	Accuracy	Unit
Case Temperature	±3	°C
Supply Voltage	±3%	V
Tx Bias Current	±10%	mA
Tx Optical Power	±3	dB
Rx Optical Power	±3	dB





9. Mechanical Specifications

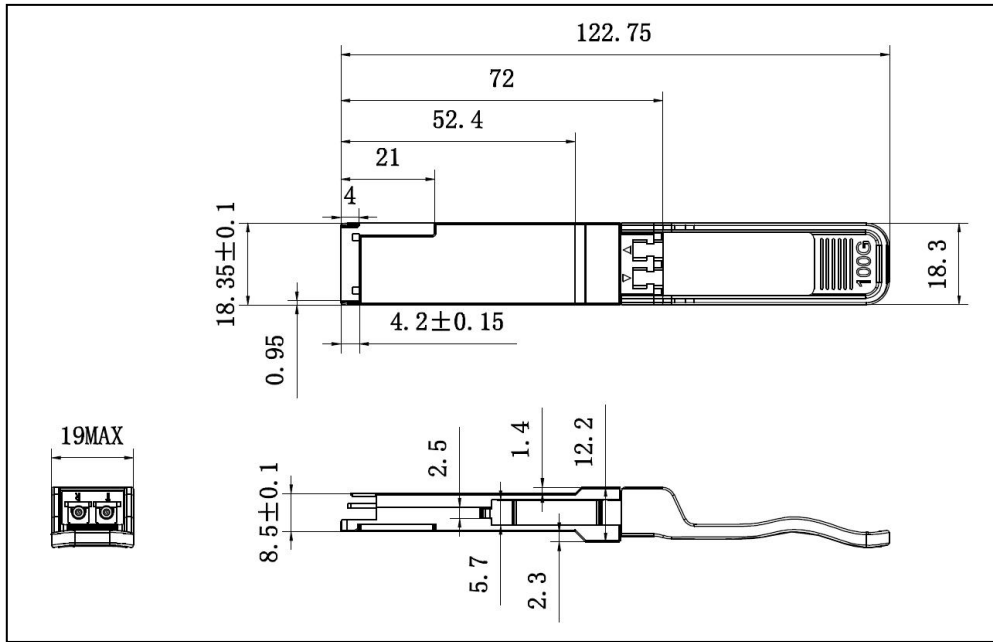

100G-QSFP28-LR4-20/

100G-QSFP28-LR4-20H/

100G-QSFP28-LR4-20HB

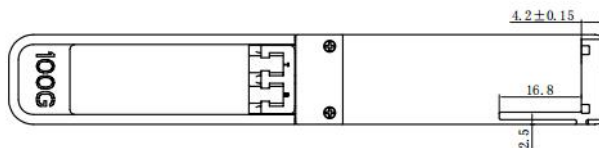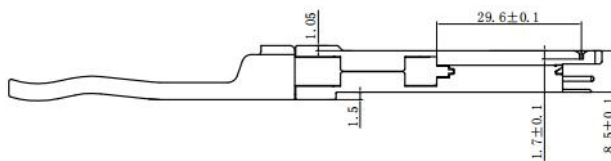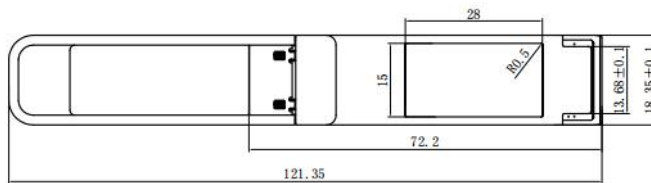

100G-QSFP28-LR4-20U