

200Gbps QSFP56 Passive Direct Attach Copper Twinax Cable Specification

1 Description

200G QSFP56 passive cable assembly products, based on 4X25G/4X28G or 4*50G/4*56G (PAM-4) structure, this product can well meet the needs of next-generation 2X100G switches, servers, routers and other product applications.

The QSFP56 cable assembly uses an optimized design to reduce crosstalk and insertion loss, has excellent signal integrity, and fully complies with the next-generation Ethernet and InfiniBand standards.


2 Features

- Compliant with QSFP + MSA and SFF-8636
- Complies with Ethernet IEEE802.3bj& IEEE802.3cd
- Support serial ID function through EEPROM
- Support hot swap, low crosstalk, low power consumption
- Support distances up to 3 meters
- Provide cable sizes from 30AWG to 26AWG
- Operating temperature range: 0°C to 70°C
- RoHS compliant

3 Applications :

- 40G /100g/200G Ethernet
- Infiniband SDR, DDR, QDR, FDR, EDR, HDR
- Switches, routers, hubs, data centers, cloud servers

4 Outline drawing:

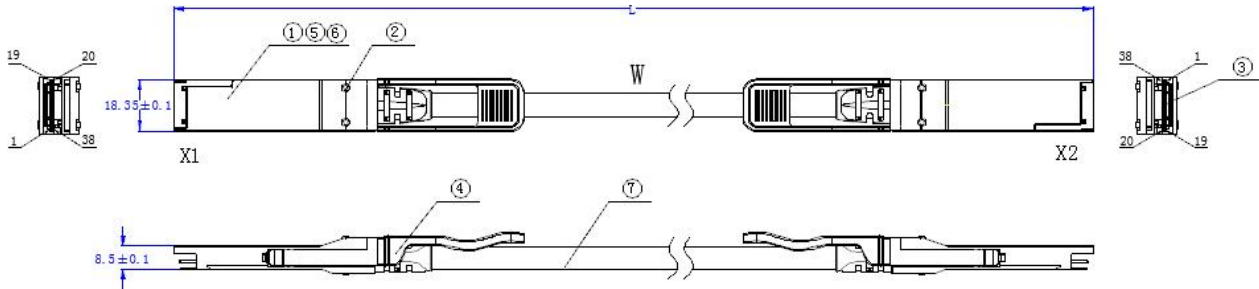

5 Wiring Diagram:

X1	X2	REMARKS	X1	X2	REMARKS
18(RX1-)	37(TX1-)	pair	37(TX1-)	18(RX1-)	pair
17(RX1+)	36(TX1+)		36(TX1+)	17(RX1+)	
15(RX3-)	34(TX3-)	pair	34(TX3-)	15(RX3-)	pair
14(RX3+)	33(TX3+)		33(TX3+)	14(RX3+)	
6 (TX4+)	25(RX4+)	pair	25(RX4+)	6 (TX4+)	pair
5 (TX4-)	24(RX4-)		24(RX4-)	5 (TX4-)	
3 (TX2+)	22(RX2+)	pair	22(RX2+)	3 (TX2+)	pair
2 (TX2-)	21(RX2-)		21(RX2-)	2 (TX2-)	
1, 4, 7, 13, 16, 19, 20, 23, 26, 32, 35, 38	1, 4, 7, 13, 16, 19, 20, 23, 26, 32, 35, 38	GND	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	EEPROM point at both ends



6 Electrical Performance:

6.1 (Signal Integrity)

(ITEM)		(REQUIREMENT)							(TEST CONDITION)
(Differential Impedance)	Cable Impedance	105+5/-10Ω							Rise time of 25ps (20% - 80%).
	Paddle Card Impedance	100±10Ω							
	Cable Termination Impedance	100±15Ω							
[Differential (Input/Output)Return loss S_{DD11}/S_{DD22}]		$\text{Return_loss}(f) \geq \left\{ \begin{array}{ll} 16.5-2\sqrt{f} & 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the return loss at frequency f							10MHz≤f≤19GHz
[Differential to common-mode (Input/Output)Return loss S_{CD11}/S_{CD22}]		$\text{Return_loss}(f) \geq \left\{ \begin{array}{ll} 22-(20/25.78)f & 0.01 \leq f < 12.89 \\ 15-(6/25.78)f & 12.89 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return_loss(f) is the Differential to common-mode return loss at frequency f							10MHz≤f≤19GHz
[Common-mode to Common-mode (Input/Output)Return loss S_{CC11}/S_{CC22}]		$\text{Return_loss}(f) \geq 2\text{dB} \quad 0.2 \leq f \leq 19$ Where f is the frequency in GHz Return_loss(f) is the common-mode to common-mode return loss at frequency f							10MHz≤f≤19GHz
[Differential Insertion Loss (S_{DD21} Max.)]		(Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture)							10MHz≤f≤19GHz
F AWG		1.25GHz	2.5GHz	5.0GHz	7.0GHz	10Ghz	12.89Ghz		
30(1m) Max.		4.5dB	5.4dB	6.3dB	7.5dB	8.5dB	10.5dB		
30/28(3m)Max.		7.5dB	9.5dB	12.2dB	14.8dB	18.0dB	21.5dB		

	26(3m) Max.	5.7dB	7.2dB	9.9 dB	11.9dB	14.1dB	16.5dB	
	26/25(5m)Ma x.	7.8dB	10.0dB	13.5dB	16.0dB	19.0dB	22.0dB	
[Insertion Loss Deviation]	-0.176*f - 0.7 ≤ ILD ≤ 0.176* f + 0.7							50MHz ≤ f ≤ 19GHz
Differential to common-mode Conversion Loss- Differential Insertion Loss(S _{CD21} -S _{DD21})	$\text{Conversion_loss}(f) - \text{IL}(f) \geq \begin{cases} 10 & 0.01 \leq f < 12.89 \\ 27 - (29/22)f & 12.89 \leq f < \end{cases}$ <p>Where f is the frequency in GHz Conversion_loss(f) is the cable assembly differential to common-mode conversion loss IL(f) is the cable assembly insertion loss</p>							10MHz ≤ f ≤ 19GHz
[MDNEXT(multiple disturber near-end crosstalk)]	≥26dB @12.89GHz							10MHz ≤ f ≤ 19GHz
[Intra Skew]	15ps/m,							10MHz ≤ f ≤ 19GHz

6.2 (Other Electrical Performance)

(ITEM)	(REQUIREMENT)	(TEST CONDITON)
[Low Level Contact Resistance]	70milliohms Max. From initial.	EIA-364-23:Apply a maximum voltage of 20mV And a current of 100 mA.
Insulation Resistance	10Mohm(Min.)	EIA364-21:AC 300V 1minute
[Dielectric Withstanding Voltage]	NO disruptive discharge.	EIA-364-20:Apply a voltage of 300 VDC for 1minute between adjacent terminals And between adjacent terminals and ground.



7 Environment Performance

(ITEM)	(REQUIREMENT)	(TEST CONDITON)
[Operating Temp. Range]	-20°C to +75°C	Cable operating temperature range.
[Storage Temp. Range (in packed condition)]	-40°C to +80°C	Cable storage temperature range in packed condition.
[Thermal Cycling Non-Powered]	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min. dwells
[Salt Spraying]	48 hours salt spraying after shell corrosive area less than 5%.	EIA-364-26
Mixed Flowing Gas	Pass electrical tests per 3.1 after stressing. (For connector only)	EIA-364-35 Class II, 14 days.
Temp. Life	No evidence of physical damage	EIA-364-17C w/ RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
Cable Cold Bend	4H, No evidence of physical damage	Condition: -20°C±2°C, mandrel diameter is 6 times the cable diameter.

8 Mechanical and Physical Characteristics

(ITEM)	(REQUIREMENT)	(TEST CONDITON)
Vibration	Pass electrical tests per 3.1 after stressing.	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis.
Cable Flex	No evidence of physical damage	Flex cable 180° for 20 cycles (±90° from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
Cable Plug Retention in Cage	90N Min. No evidence of physical damage	Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1 Pull on cable jacket approximately 1 ft behind cable plug. No functional damage to

		cable plug below 90N. Per SFF-8432 Rev 5.0
Cable Retention in Plug	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
Mechanical Shock	Pass electrical tests Per 3.1 after stressing.	Clamp and shock per EIA-364-27B, TC-G,3 times in 6 directions, 100g, 6ms.
Cable Plug Insertion	40N Max.(QSFP28)	Per SFF8661 Rev 2.1
Cable plug Extraction	30N Max. (QSFP28)	Place axial load on de-latch to de-latch plug.Per SFF8661 Rev 2.1
Durability	50 cycles, No evidence of physical damage	EIA-364-09, perform plug & unplug cycles: Plug and receptacle mate rate: 250times/hour. 50times for QSFP28/SFP28 module (CONNECTOR TO PCB)