



# **40Gbps QSFP+ To 4x 10G SFP+ Passive Direct Attach Copper Breakout Cable Specification**

## **1 Description:**

QSFP + to 4SFP + Passive Direct Copper is a cost-effective, high-speed interconnect solution that allows cables to connect QSFP + and SFP + switches and network devices without the need to upgrade an entire data center or storage array. Enables Customers to Interconnect Between 40G and 10G Devices (NIC / HBA / CNA, Switch Devices, and Servers).


## **2 Features:**

- Protocol agnostic support of 40GbE, QDR InfiniBand, SAS & Fibre Channel
- 10Gbps transfer rate per SFP+ channel (40 Gb/s aggregate)
- Compliant with SFF-8436 / SFF-8431
- Compliant with IEEE 802.3ba/ Infiniband QDR specifications
- Enhanced EMI/EMC performance
- Supports serial ID functionality thru EEPROM
- Passive cable assembly supports distances up to 7meters
- 30AWG to 24AWG cable sizes available
- RoHS compliant

## **3 Applications :**

- Switches / Routers / HBAs/SAN,NIC cards
- Server & Storage Devices
- Data Center Networking
- Fiber Channel
- InfiniBand QDR/DDR
- 10Gbs/40Gbs Ethernet

#### 4 Outline drawing :

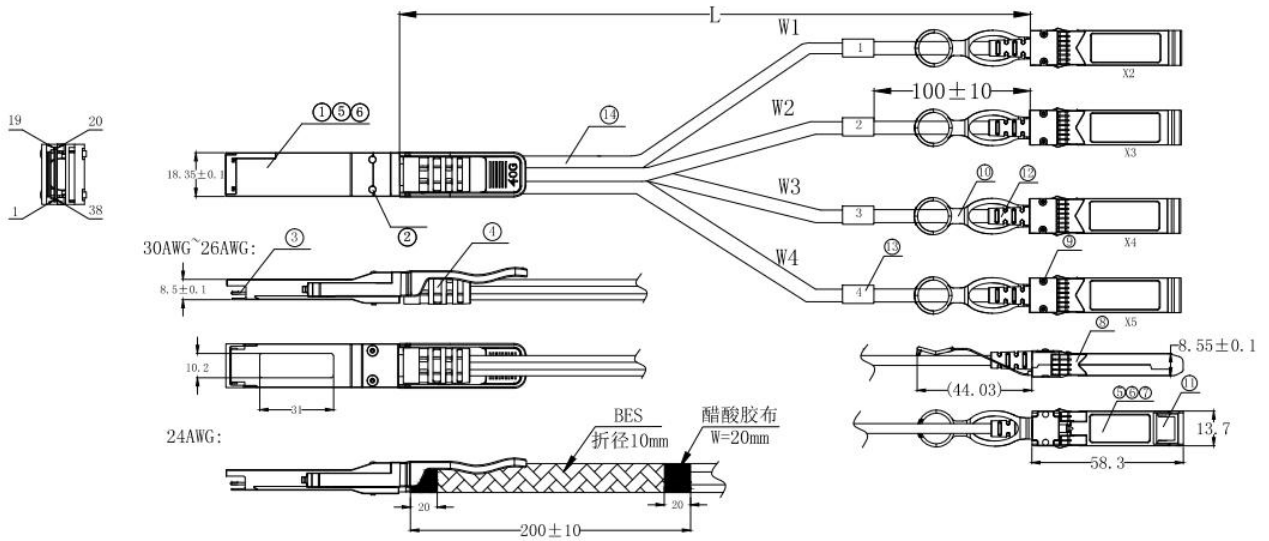

#### 5 Wiring Diagram:

wire	Starting signal	Starting	End	End signal
W1	RX1+	X1. 17	X2. 18	TX1+
	RX1-	X1. 18	X2. 19	TX1-
	GND	X1. 19	X2. 20	GND
	TX1+	X1. 36	X2. 13	RX1+
	TX1-	X1. 37	X2. 12	RX1-
	GND	X1. 38	X2. 14	GND
W2	GND	X1. 20	X3. 20	GND
	RX2-	X1. 21	X3. 19	TX2-
	RX2+	X1. 22	X3. 18	TX2+
	GND	X1. 1	X3. 14	GND
	TX2-	X1. 2	X3. 12	RX2-
	TX2+	X1. 3	X3. 13	RX2+
W3	RX3+	X1. 14	X4. 18	TX3+
	RX3-	X1. 15	X4. 19	TX3-
	GND	X1. 16	X4. 20	GND
	TX3+	X1. 33	X4. 13	RX3+
	TX3-	X1. 34	X4. 12	RX3-
	GND	X1. 35	X4. 14	GND
W4	GND	X1. 23	X5. 20	GND
	RX4-	X1. 24	X5. 19	TX4-
	RX4+	X1. 25	X5. 18	TX4+
	GND	X1. 4	X5. 14	GND
	TX4-	X1. 5	X5. 12	RX4-
	TX4+	X1. 6	X5. 13	RX4+

## 6 Electrical Performance:

### 6.1 (Signal Integrity)

(ITEM)		(REQUIREMENT)	(TEST CONDITION)																																		
(Differential Impedance)	Cable Impedance	105±5/-5Ω	Rise time of 35ps (20% - 80%).																																		
	Paddle Card Impedance	100±10Ω																																			
	Cable Termination Impedance	100±15Ω																																			
[Differential (Input/Output) Return loss S <sub>DD11</sub> /S <sub>DD22</sub> ]	$Return\ loss(f) \geq \begin{cases} 10 & 0.01 \leq f < 4.1 \\ 6.3 - 13 \log_{10}(f/5.5) & 4.1 \leq f \leq 11.1 \end{cases}$ <p>Where <math>f</math> is the frequency in GHz Return loss(f) is the return loss at frequency <math>f</math></p>	0.01GHz ≤ f ≤ 11.1GHz z SFF-8431 Rev.4.1																																			
[Differential Insertion Loss (S <sub>DD21</sub> Max.)]	<p>(Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture)</p> <table border="1"> <thead> <tr> <th>F</th> <th>0.6GHz</th> <th>1.25GHz</th> <th>2.5GHz</th> <th>5.0GHz</th> </tr> </thead> <tbody> <tr> <td>AWG</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>30AWG(1m)Max.</td> <td>2dB</td> <td>3dB</td> <td>4.5dB</td> <td>7.5dB</td> </tr> <tr> <td>30AWG(2m)Max.</td> <td>4dB</td> <td>5dB</td> <td>7dB</td> <td>10dB</td> </tr> <tr> <td>28AWG (3m)Max.</td> <td>4dB</td> <td>5.5dB</td> <td>7.5dB</td> <td>12dB</td> </tr> <tr> <td>26AWG(5m)Max.</td> <td>5.5dB</td> <td>7dB</td> <td>10dB</td> <td>16.0dB</td> </tr> <tr> <td>24AWG(7m&amp;10m)Max.</td> <td>6.5dB</td> <td>10dB</td> <td>14dB</td> <td>21dB</td> </tr> </tbody> </table>	F	0.6GHz	1.25GHz	2.5GHz	5.0GHz	AWG					30AWG(1m)Max.	2dB	3dB	4.5dB	7.5dB	30AWG(2m)Max.	4dB	5dB	7dB	10dB	28AWG (3m)Max.	4dB	5.5dB	7.5dB	12dB	26AWG(5m)Max.	5.5dB	7dB	10dB	16.0dB	24AWG(7m&10m)Max.	6.5dB	10dB	14dB	21dB	10MHz ≤ f ≤ 5GHz
F	0.6GHz	1.25GHz	2.5GHz	5.0GHz																																	
AWG																																					
30AWG(1m)Max.	2dB	3dB	4.5dB	7.5dB																																	
30AWG(2m)Max.	4dB	5dB	7dB	10dB																																	
28AWG (3m)Max.	4dB	5.5dB	7.5dB	12dB																																	
26AWG(5m)Max.	5.5dB	7dB	10dB	16.0dB																																	
24AWG(7m&10m)Max.	6.5dB	10dB	14dB	21dB																																	
[MDNEXT(multiple disturber near-end crosstalk)]	≥26dB	10MHz ≤ f ≤ 5GHz																																			
[Insertion Loss Deviation]	$-0.7 - 0.2 \cdot 10^{-3} f \leq ILD \leq 0.7 + 0.2 \cdot 10^{-3} f$ <p>(f is the frequency in MHz),</p>	10MHz ≤ f ≤ 5GHz																																			

## 6.2 (Other Electrical Performance)

(ITEM)	(REQUIREMENT)	(TEST CONDITON)
[Low Level Contact Resistance]	70milliohms Max. From initial.	EIA-364-23:Apply a maximum voltage of 20mV And a current of 100 mA.
Insulation Resistance	10Mohm(Min.)	EIA364-21:AC 300V 1minute
[Dielectric Withstanding Voltage]	DC 500V 1 minute disruptive discharge.	EIA-364-20:Apply a voltage of 500 VDC for 1minute between adjacent terminals And between adjacent terminals and ground.

## 7 (Environment Performance)

(ITEM)	(REQUIREMENT)	(TEST CONDITON)
[Operating Temp. Range]	-20°C to +75°C	Cable operating temperature range.
[Storage Temp. Range (in packed condition)]	-25°C to +65°C	Cable storage temperature range in packed condition.
[Thermal Cycling Non-Powered]	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min. dwells
[Salt Spraying]	48 hours salt spraying after shell corrosive area less than 5%.	EIA-364-26
Mixed Flowing Gas	Pass electrical tests per 3.1 after stressing. (For connector only)	EIA-364-35 Class II,14 days.
Temp. Life	No evidence of physical damage	EIA-364-17C w/ RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
Cable Cold Bend	4H, No evidence of physical damage	Condition: -20°C±2°C, mandrel diameter is 6 times the cable diameter.

## 8 Mechanical and Physical Characteristics

(ITEM)	(REQUIREMENT)	(TEST CONDITON)
Vibration	Pass electrical tests per 3.1 after stressing.	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis.
Cable Flex	No evidence of physical damage	Flex cable 180° for 20 cycles ( $\pm 90^\circ$ from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
Cable Plug Retention in Cage	90N Min. No evidence of physical damage	Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1 Pull on cable jacket approximately 1 ft behind cable plug. No functional damage to cable plug below 90N. Per SFF-8432 Rev 5.0
Cable Retention in Plug	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
Mechanical Shock	Pass electrical tests Per 3.1 after stressing.	Clamp and shock per EIA-364-27B, TC-G,3 times in 6 directions, 100g, 6ms.
Cable Plug Insertion	40N Max.(QSFP+) 18N Max.(SFP+)	Per SFF8432 Rev 5.0.
Cable plug Extraction	30N Max. (QSFP28) 12.5N Max. (SFP28)	Measure without the aid of any cage kick-out springs. Place axial load on de-latch to de-latch plug. Per SFF-8432 Rev 5.0.
Durability	50 cycles, No evidence of physical damage	EIA-364-09, perform plug & unplug cycles: Plug and receptacle mate rate: 250times/hour. 50times for QSFP28/SFP28 module (CONNECTOR TO PCB)