

40G QSFP Active Optical Cable

Specification

1 Description:

QSFP+ Active Optical Cable offers 4 independent data transmission channels and 4 data receiving channels via the multimode ribbon fibers, each capable of 10Gb/s operation. Consequently, an aggregate data rate of 40Gb/s over 100 meters transmission can be achieved by this product, to support the ultra-fast computing data exchange.


2 Features

- 4 channels 850nm VCSEL and PIN
- Electrical interface compliant to SFF-8436
- Support 40GE data rate
- Hot Pluggable QSFP form factor
- Built-in digital diagnostic functions
- Operating case temperature 0°C to +70°C
- 3.3V power supply voltage
- Round OFNP-rated cable

3 Applications

- 10Gbs~40Gbs Ethernet
- Data storage and communications industry
- Servers and data storage devices
- Switch/router/HBA, etc.

4 Outline drawing

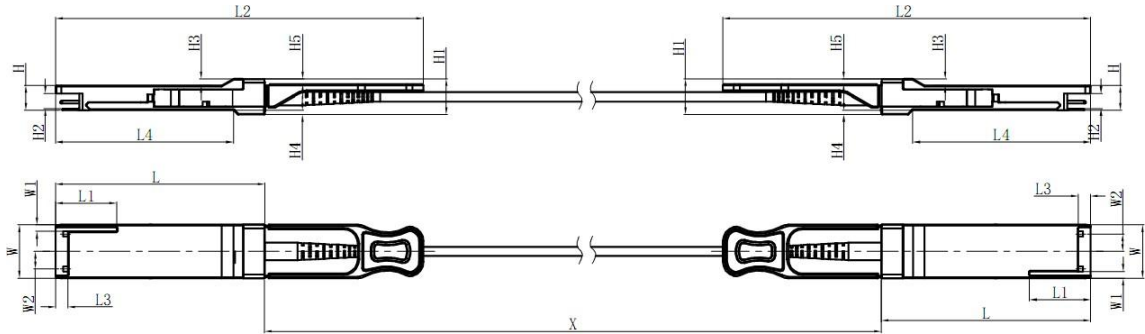


	L	L1	L2	L3	L4	W	W1	W2	H	H1	H2	H3	H4	H5	H6
Max	72.2	-	128	4.35	61.4	18.45	-	6.2	8.6	12.4	5.35	2.5	1.6	2.0	-
Type	72.0	-	-	4.20	61.2	18.35	-	-	8.5	12.2	5.2	2.3	1.5	1.8	6.55
Min	68.8	16.5	124	4.05	61.0	18.25	2.2	5.8	8.4	12.0	5.05	2.1	1.3	1.6	-

Cable Length (Unit: m)	Tolerant (Unit: cm)
<1.0	+5/-0
1.0~4.5	+15/-0
5.0~14.5	+30/-0
≥15.0	+2%/-0

5 Wiring Diagram

5.1 pin design

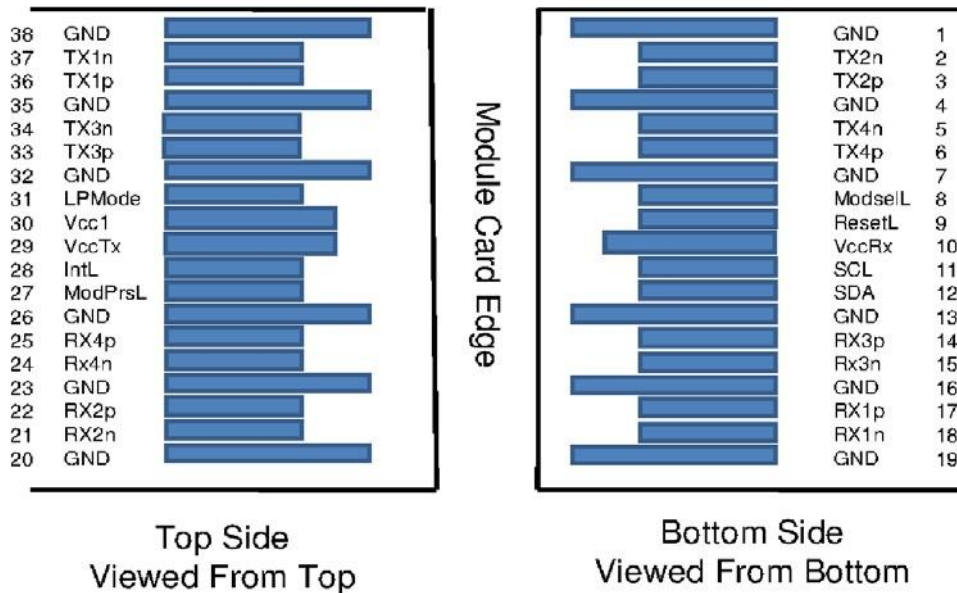

5.2 pin design

Pin	Symbol	Name/Description	Notes
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	1
8	ModSel L	Module Select	
9	ResetL	Module Reset	
10	Vcc Rx	+3.3V Power Supply Receiver	
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	1
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrs L	Module Present	
28	IntL	Interrupt	
29	Vcc Tx	+3.3V Power supply transmitter	
30	Vcc1	+3.3V Power supply	
31	LPMODE	Low Power Mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	
35	GND	Ground	1
36	Tx1p	Transmitter Non-Inverted Data Input	



37	TxIn	Transmitter Inverted Data Input		
38	GND	Ground		1

6. Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Notes	
ModSelL	Module Select	V_{OL}	0	-	0.8	V	
	Module Unselect	V_{OH}	2.5	-	V_{CC}	V	
LPMode	Low Power Mode	V_{IL}	0	-	0.8	V	
	Normal Operation	V_{IH}	2.5	-	$V_{CC}+0.3$	V	
ResetL	Reset	V_{IL}	0	-	0.8	V	
	Normal Operation	V_{IH}	2.5	-	$V_{CC}+0.3$	V	
ModPrsL	Normal Operation	V_{OL}	0	-	0.4	V	
IntL	Interrupt	V_{OL}	0	-	0.4	V	
	Normal Operation	V_{oH}	2.4	-	V_{CC}	V	
Electrical transmitter Characteristics							
Differential Data Input Swing	V_{out}	200	-	1600	mV		
Output Differential Impedance	Z_D	90	100	110	Ω		
Electrical Receiver Characteristics							
Differential Data Output Swing	$V_{in,P-P}$	350	-	800	mV _{pp}		
Bit Error Rate	BER			E-12		1	
Input Differential Impedance	Z_{IN}	90	100	110	Ω		

7. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	T_C	0	-	+70	$^{\circ}C$	
Power Supply Voltage	V_{CC}	3.14	3.3	3.47	V	
Power Dissipation	P_d	-	-	1.5	W	1
Bit Rate	BR	1.25	10.3125	-	Gbps	

8. Absolute Maximum Ratings:

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Supply Voltage	V_{CC3}	-0.5	-	+3.6	V	
Storage Temperature	T_s	-10	-	+70	$^{\circ}C$	
Operating Humidity	RH	+5	-	+85	%	1